

exclusive
TILES

1200X1200MM



Versatile Size

www.exclusivetiles.co.in

THE COLLECTION


Premiere is a collection

worthy of the best stages



Entirely

unmatched standards of beauty




CARBON BEIGE

Versatile Edition




1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.

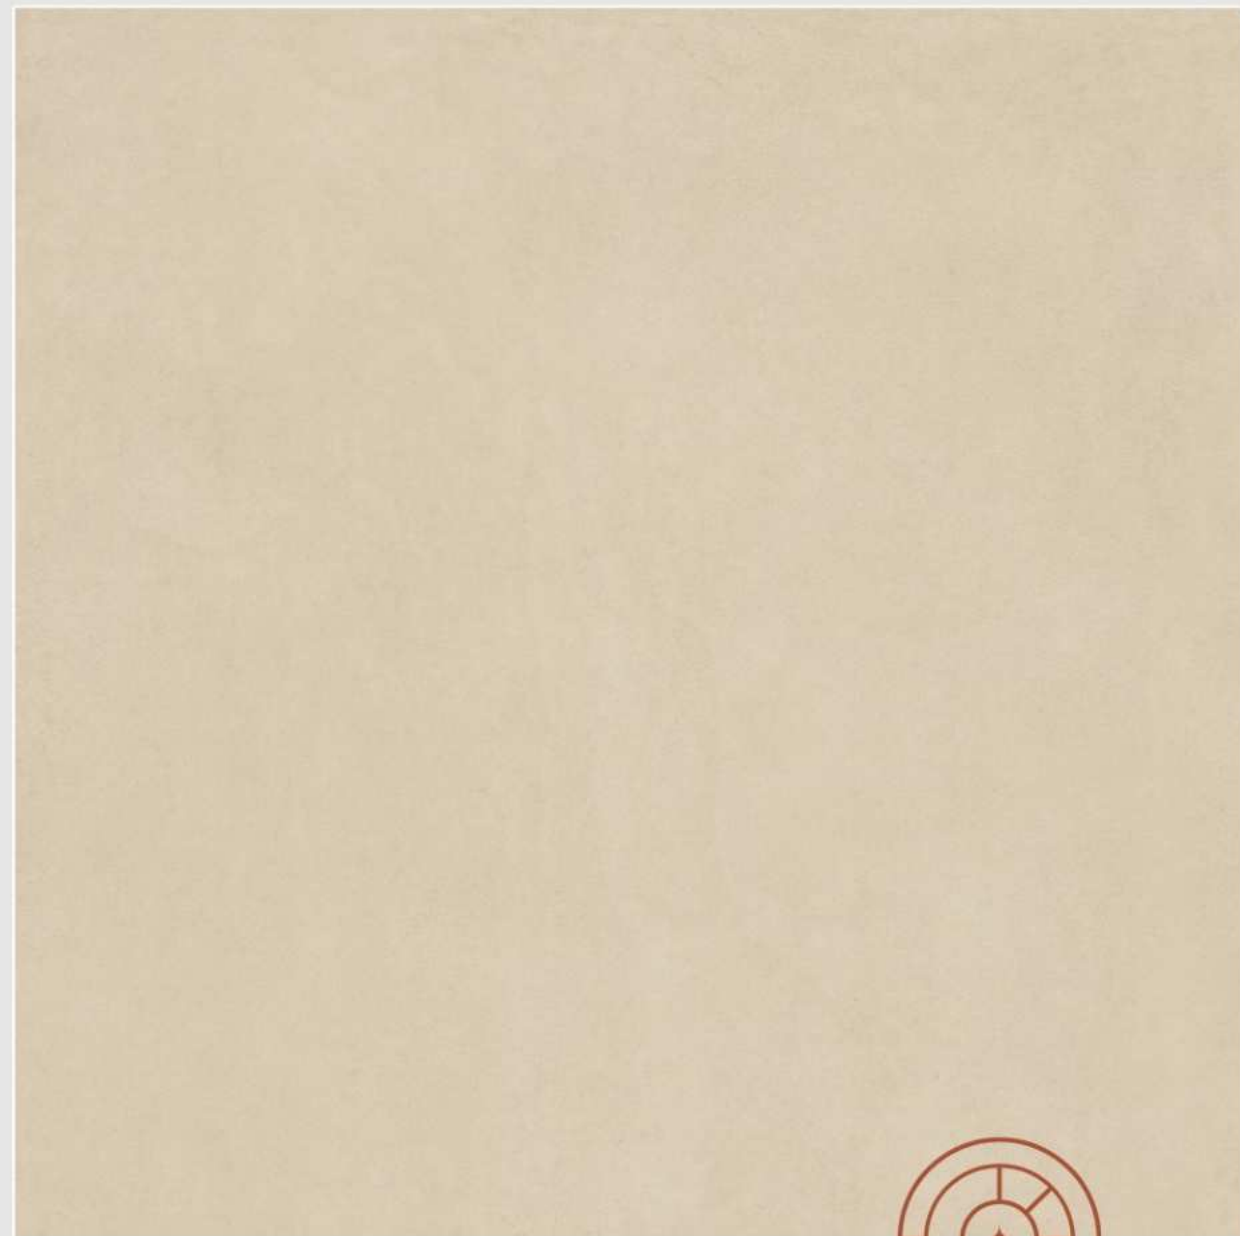

CARBON BEIGE






Entirely

unmatched standards of beauty



CARBON CEMENTO

Versatile Edition

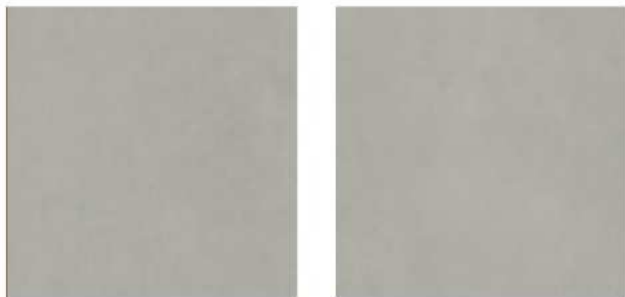


1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.



CARBON CEMENTO




*Entirely
unmatched standards of beauty*



CARBON GRIS

Versatile Edition

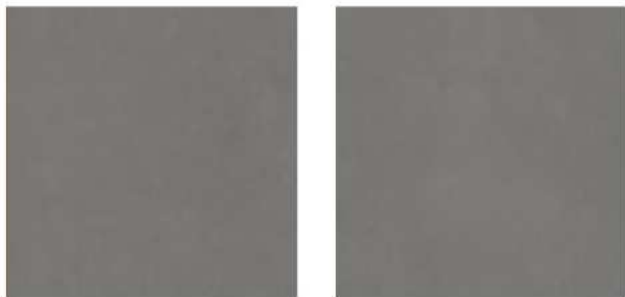


1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.



CARBON GRIS



Exclusively
unmatched standards of beauty




CARBON OLIVE

Versatile Edition



1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.


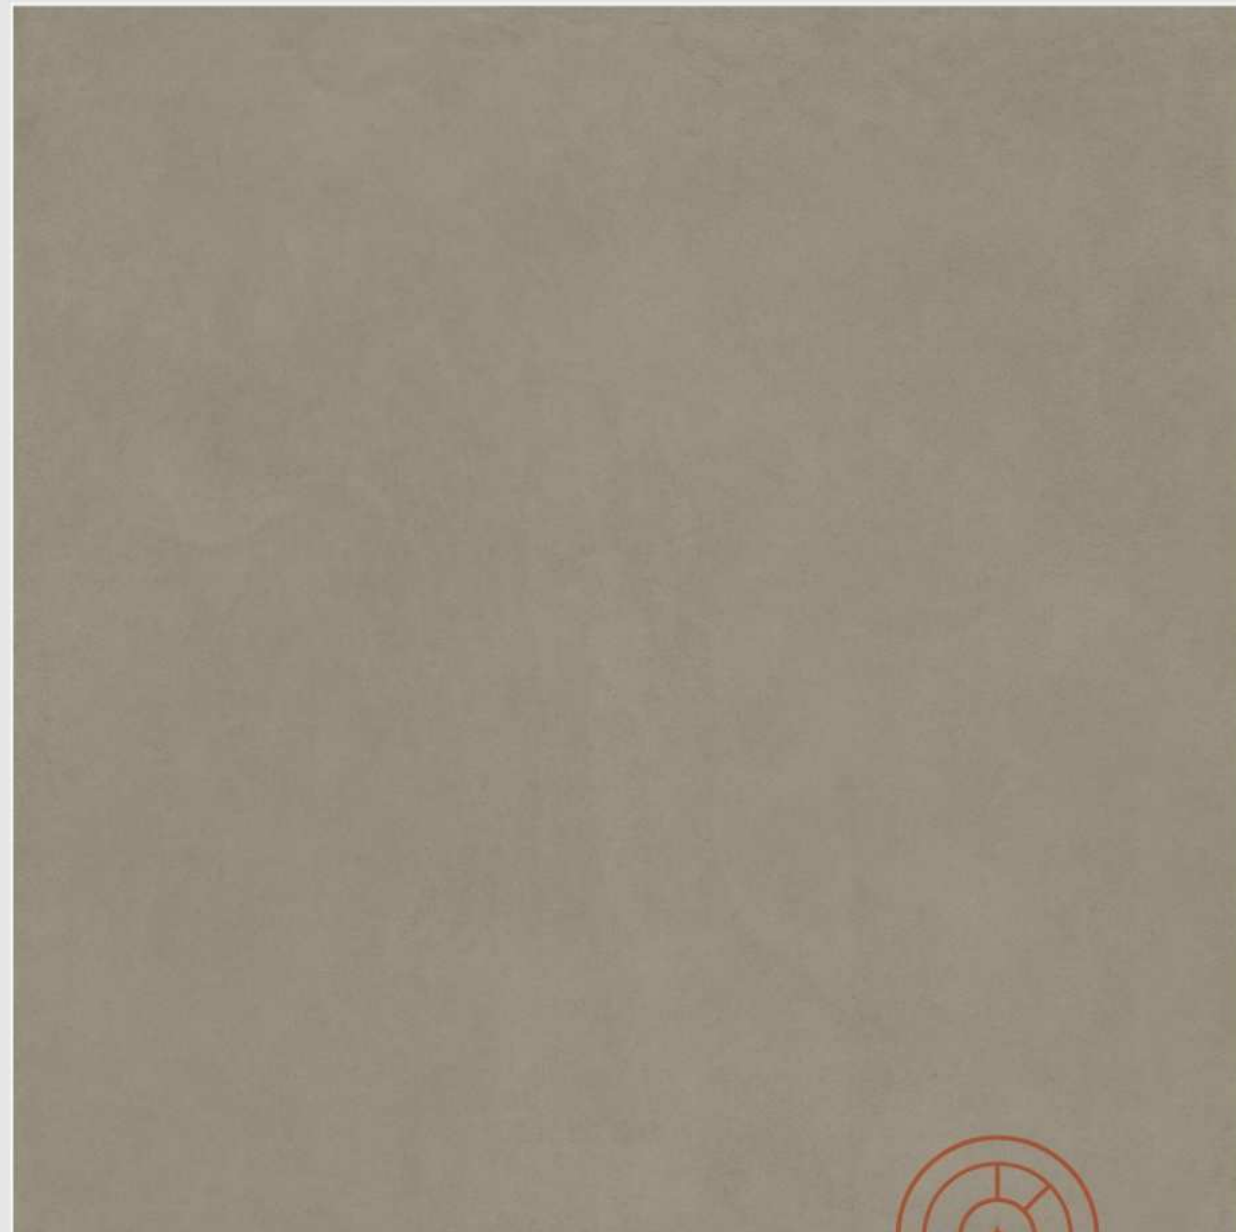


CARBON OLIVE



Entirely

unmatched standards of beauty

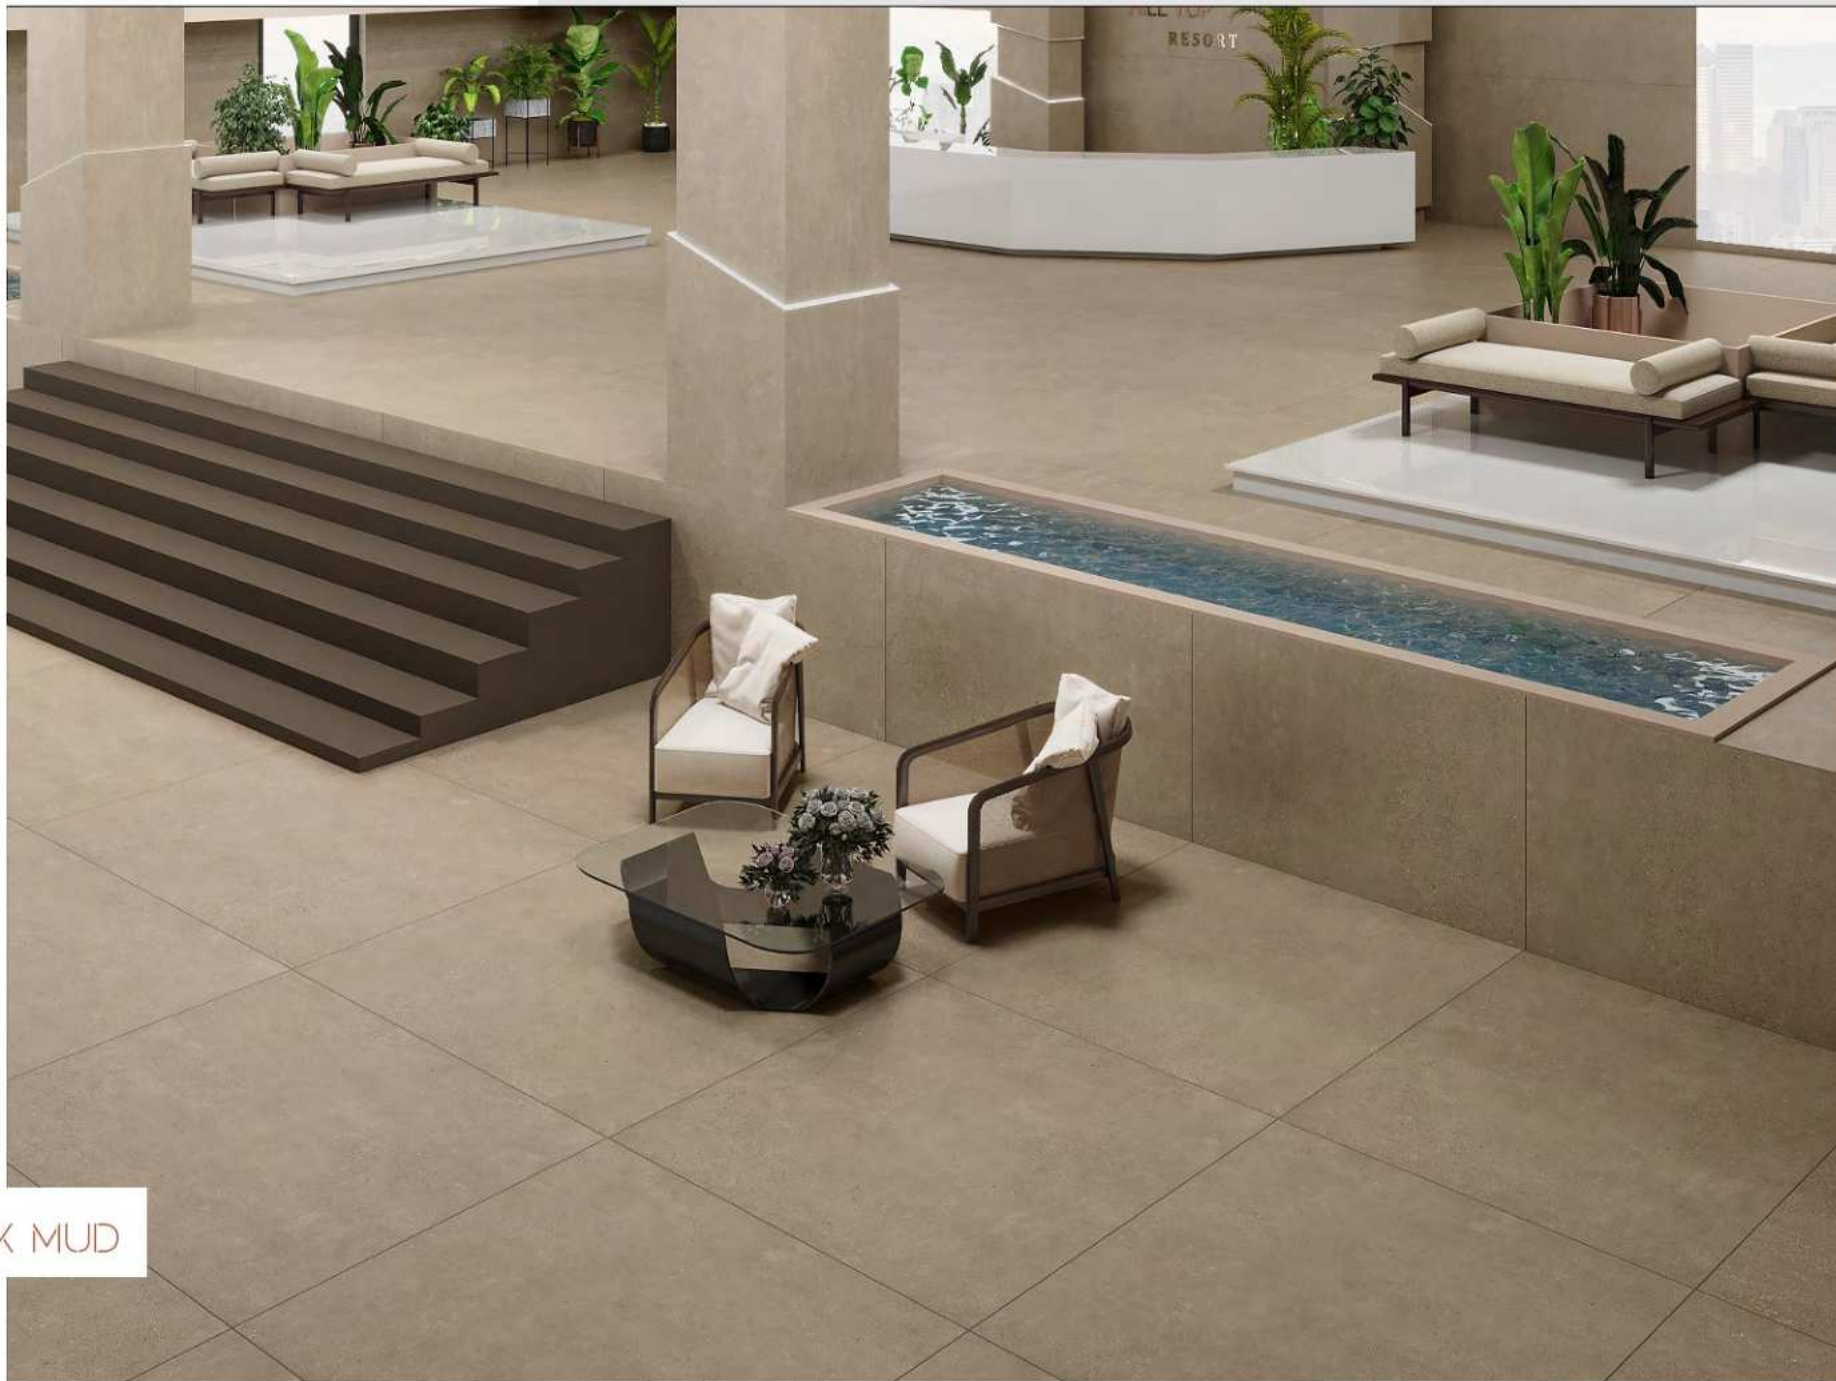


FLACK MUD

Versatile Edition



1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.

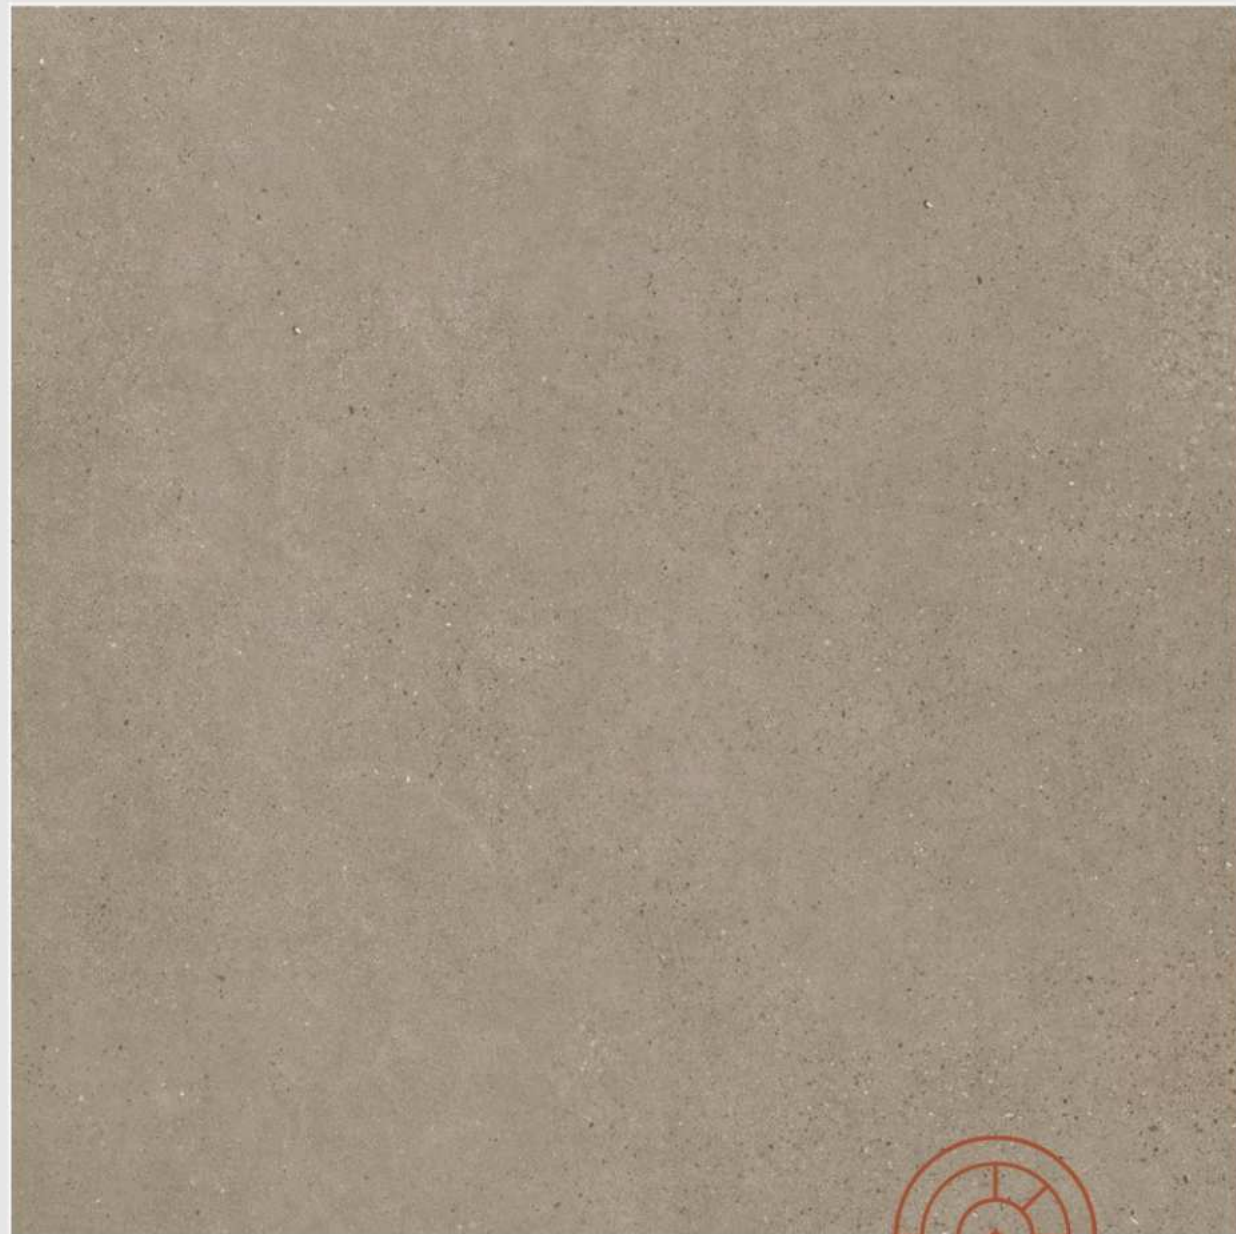


FLACK MUD




Entirely

unmatched standards of beauty




FLAKE FUME

Versatile Edition

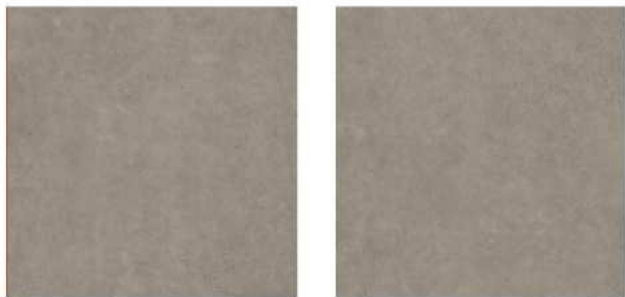

1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.

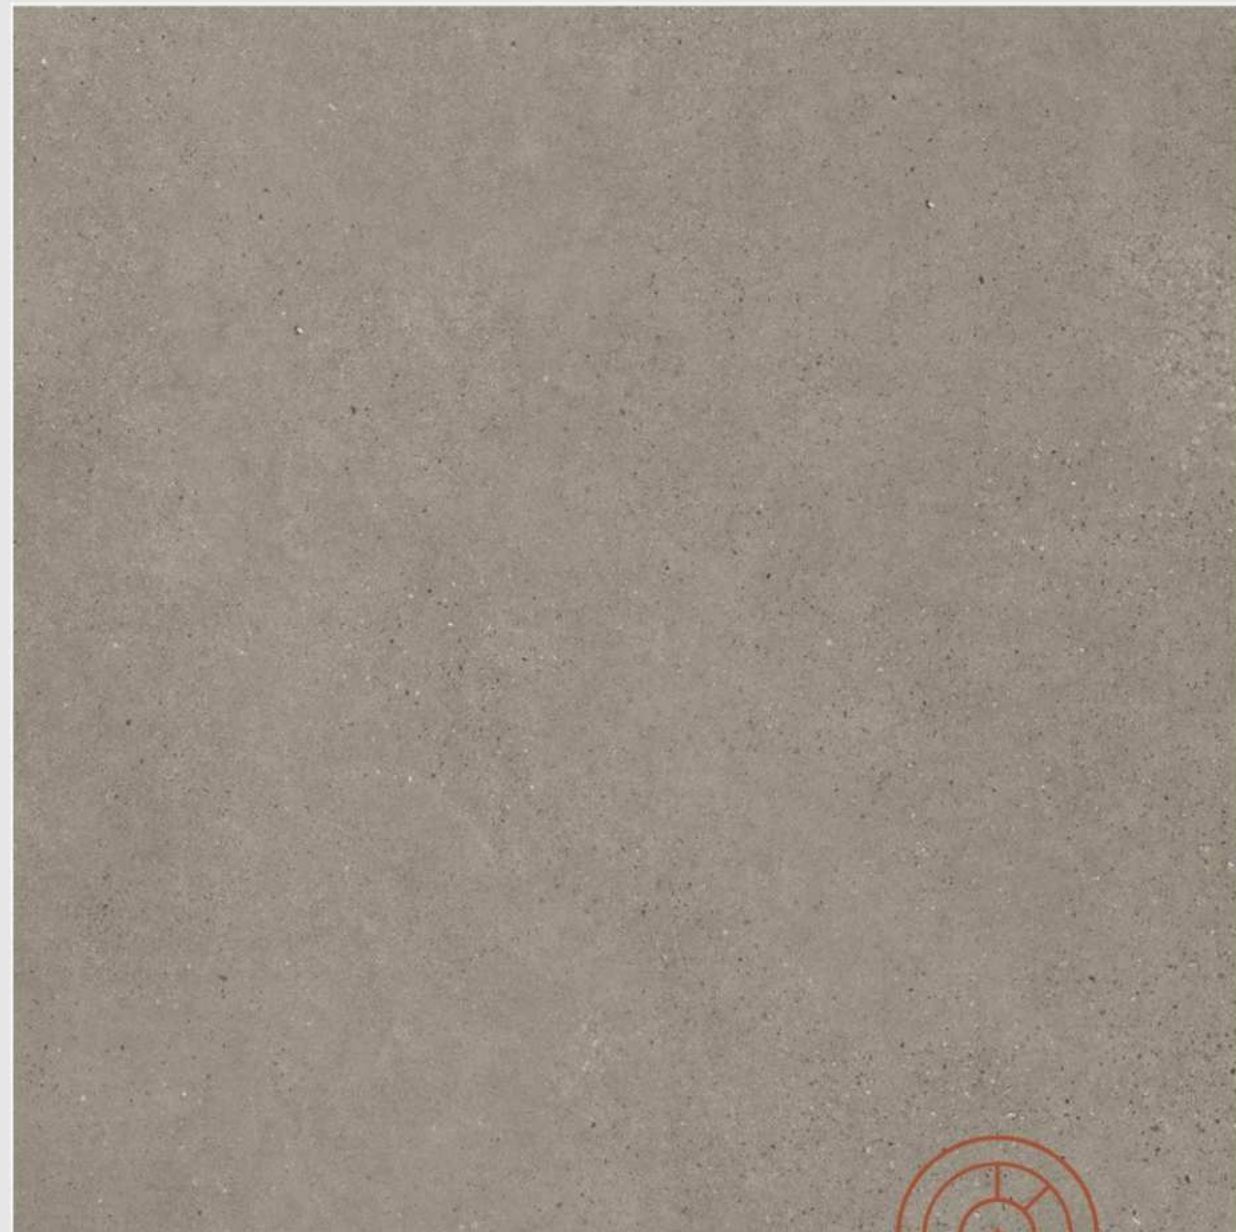


FLAKE FUME



Entirely

unmatched standards of beauty



FLAKE GRIT

Versatile Edition



1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.




FLAKE GRIT



Entirely

unmatched standards of beauty



FLAKE OFF WHITE

Versatile Edition



1200X1200MM, MATT SURFACE,
03 RANDOM, 9MM THICKNESS.



FLAKE OFF WHITE



TECHNICAL specification

CHARACTERISTIC	STANDERD AS PER ISO - 13006/EN14411 GROUP Bla	MEAN VALUE OF 1200X1200MM	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.5%	ISO-10545-2.
Deviation in thickness	± 5.0%	± 5.0%	ISO-10545-2
Straightness in side	± 0.5%	± 0.5%	ISO-10545-2
Rectangularity	± 0.5%	± 0.5%	ISO-10545-2
Surface flatness	± 0.5%	± 0.5%	ISO-10545-2
Color difference	Unalterd	No change	ISO-10545-16
Glossiness	As per mfg	NOT APPLICABLE (MATT)	GLOSS METER
STRUCTURAL PROPERTIES			
Water absorption	<0.50%	<0.50 %	ISO-10545-3
Apparent density	>2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm2	Min. 35 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 1300 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion(CE))	Max. 9.0 x 10-6	Max. 6.5 x 10-6	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	>0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg	Does not yield- Pb & Cd	ISO-10545-15

SIZE	THICKNESS (Approx*)	PIECES/BOX	AREA / BOX (Approx*)	WEIGHT / BOX (Approx*)
1200x1200 mm	9mm	2 pcs.	2.88 sq.mtr, 31 sq.ft	60kg

thank you for your time