

exclusive
TILES

feel the fab




www.exclusivetiles.co.in



so smooth

Its unique texture creates a luxurious feel that adds depth to any space.

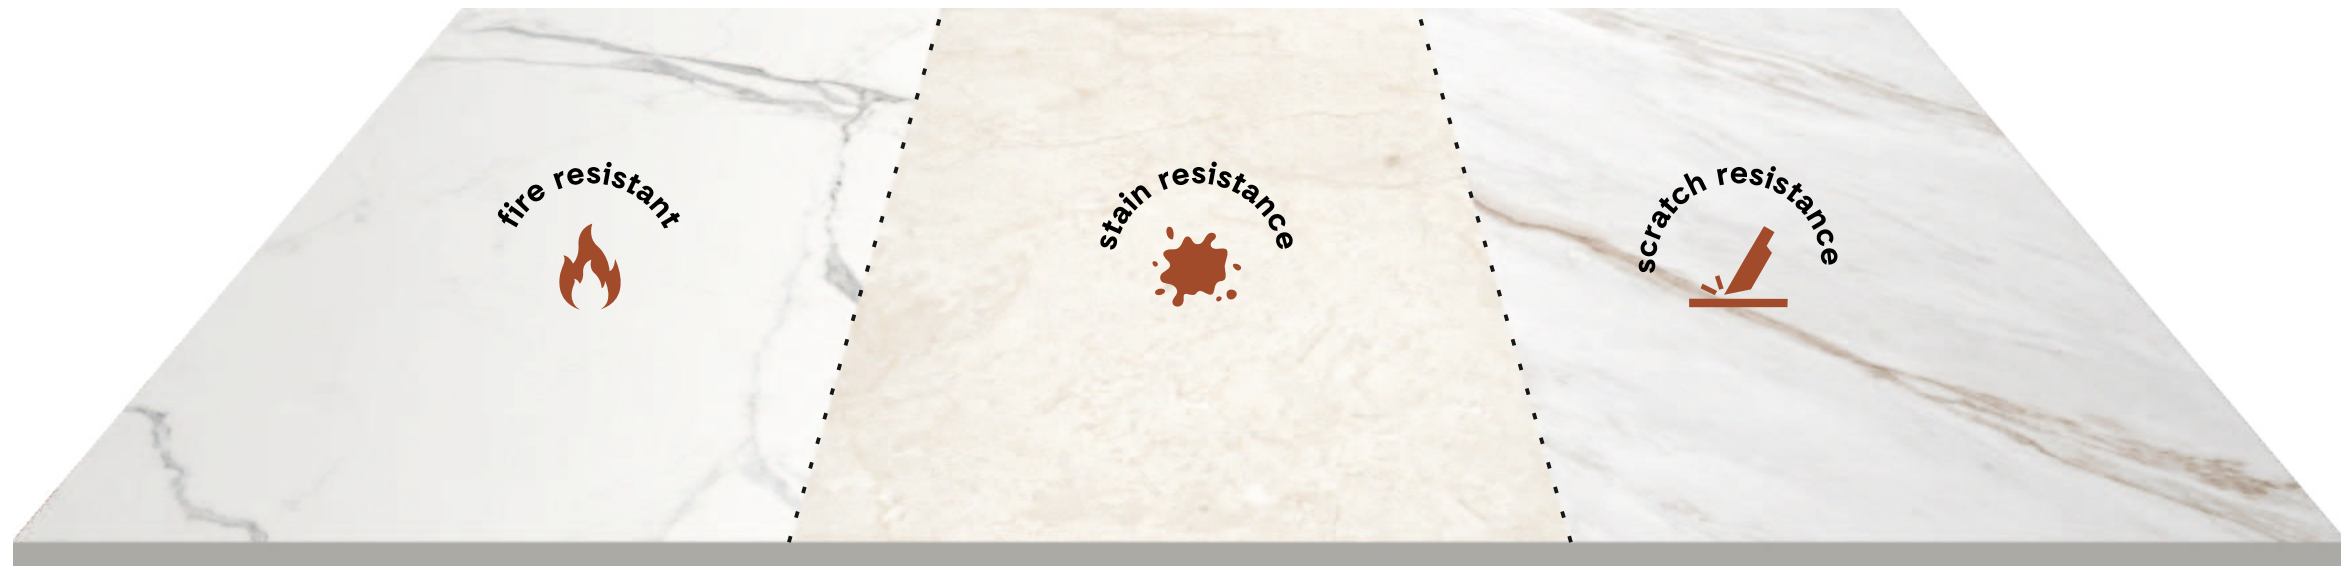

ultra technical

The image showcases its durability and reliability.





Wellness

arrezzo bianco

arrezzo bianco

fab surface

1200x1800mm

9mm thickness

Random : 03





bosco grey


bosco grey

fab surface

1200x1800mm

9mm thickness

Random : **03**

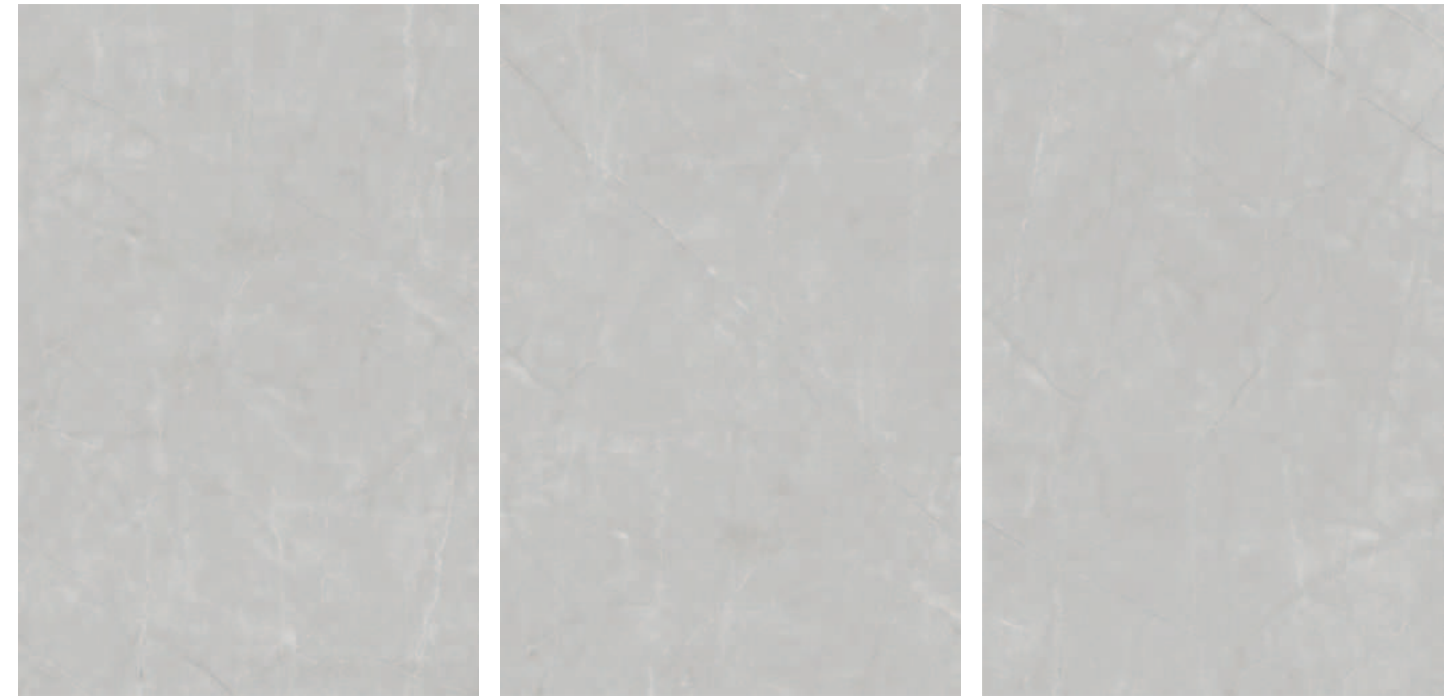



castle grey

castle grey

fab surface

1200x1800mm

9mm thickness

Random : 03





celina natural

celina natural

fab surface

1200x1800mm

9mm thickness

Random : 02





crema elice

crema elice

fab surface

1200x1800mm

9mm thickness

Random : 02





limer grey

limer grey

fab surface

1200x1800mm

9mm thickness

Random : **02**





pallisandro white

pallisandro white

fab surface

1200x1800mm

9mm thickness

Random : 03





MEMBER EARLY HOURS
JANUARY 1, 2019
FIGUR



perlato royal

perlato royal


fab surface

1200x1800mm

9mm thickness

Random : **03**





sparkle beige

sparkle beige

fab surface

1200x1800mm

9mm thickness

Random : **02**





WHITE
wellness
and spa



statuario rome

statuario rome

fab surface

1200x1800mm

9mm thickness

Random : 03



TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45N/mm ²
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 ⁻⁶ °C ⁻¹	≤ 7 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil

PACKING DEATILS

Size	Pcs / Box	Weight (Approx)	Thickness (Approx)	SQ. / Box
1200x1800	2	90 kg	9mm	46.50

exclusive

TILES

Our Factories



Corporate Office:

1101, Nakshtra Heights, 150 Feet Ring Road,
Rajkot 360 005, GUJARAT. India.

m: +91 98985 58999 & +91 63526 94291

email: export@exclusivetiles.co.in | info@exclusivetiles.co.in

W: www.exclusivetiles.co.in