


exclusive

TILES



800X
2400MM



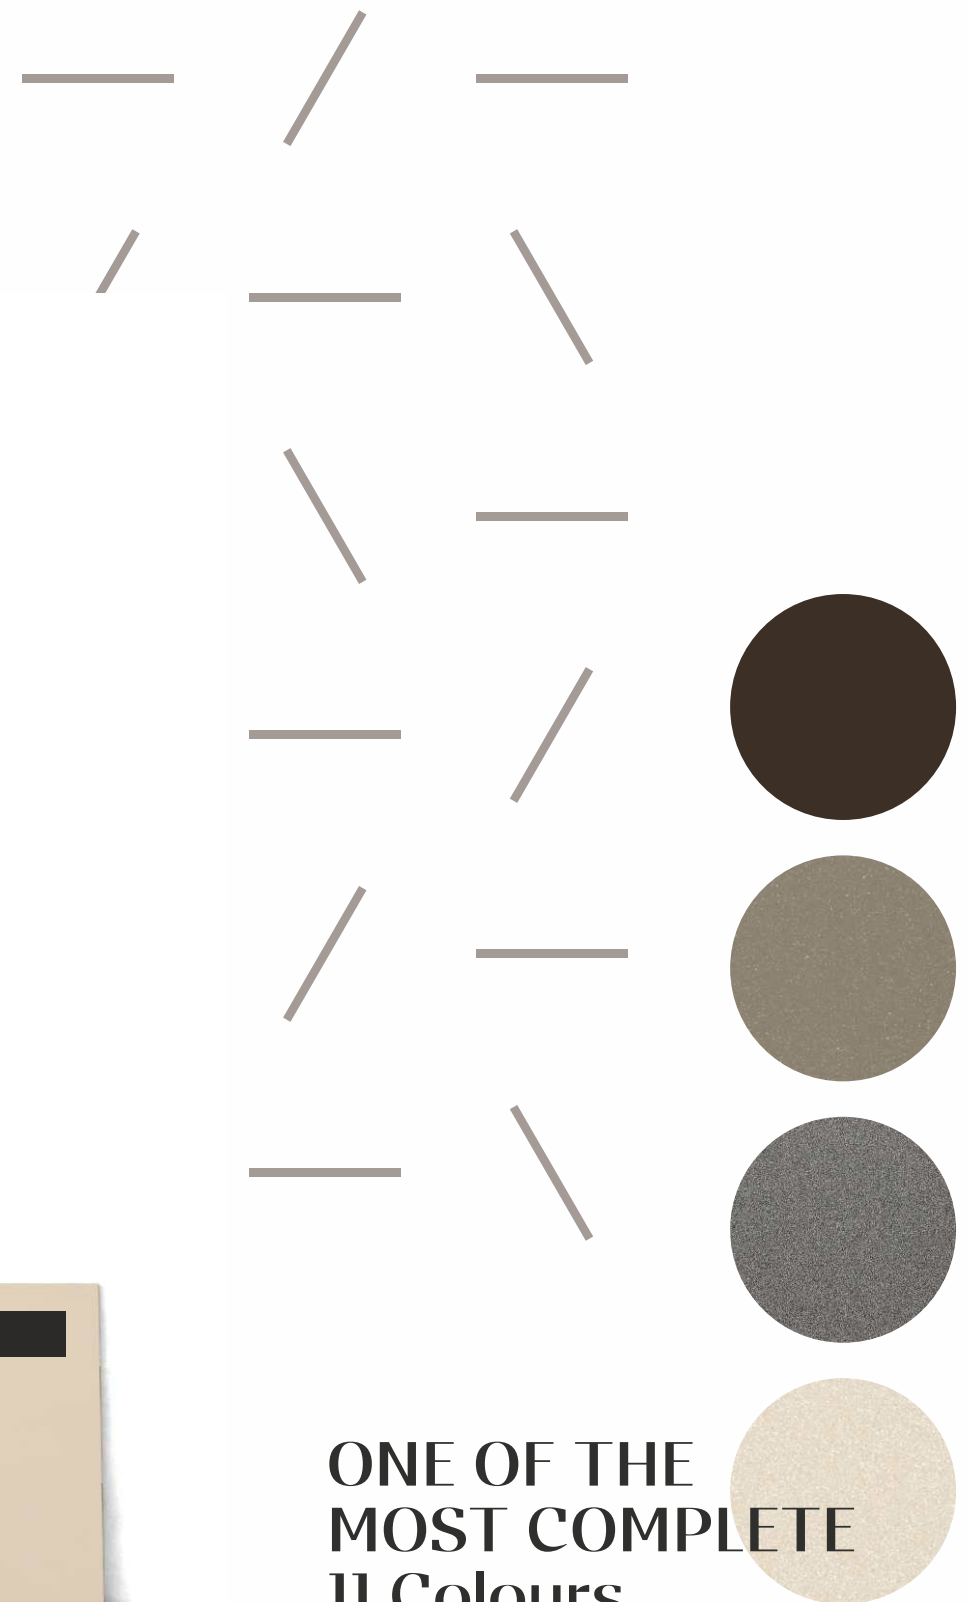

ONE OF THE
MOST COMPLETE
11 Colours
RANGE OF
FULLBODY
ON THE MARKET

There are no
limits to space,
there are no
limits to design.

Features



Lowest maintenance



Antibacterial surface



Water resistant



Impact resistant



Frost resistant



Scratch resistant



Stain resistant



Fire resistant



Heat resistant







Resistant to bending

15^{MM}
THICKNESS

Application

- Kitchen countertop
- Dining table
- Table top
- Door and window frame
- Shelves
- Shower base
- Vanity top
- Wash basin
- Staircase
- Bathtub
- Floor & Wall

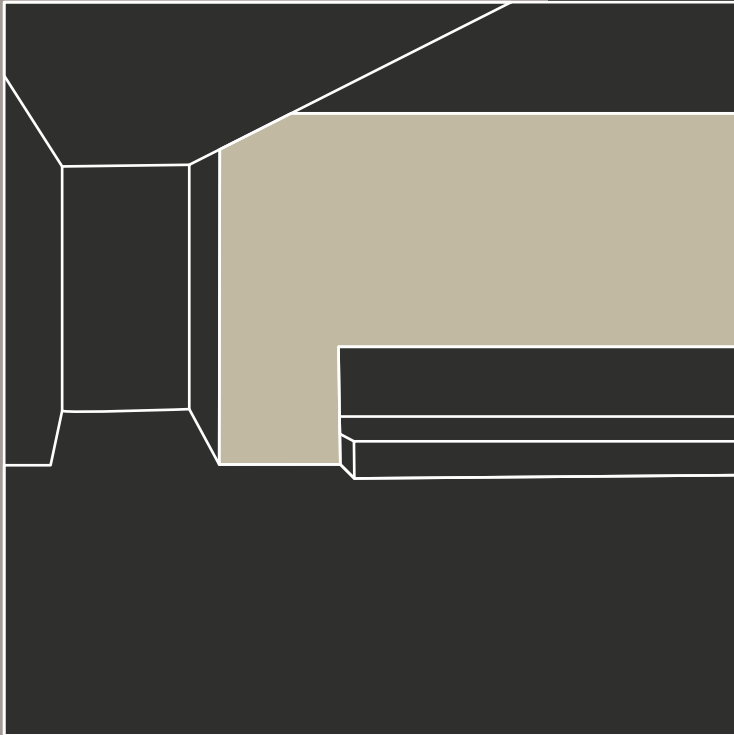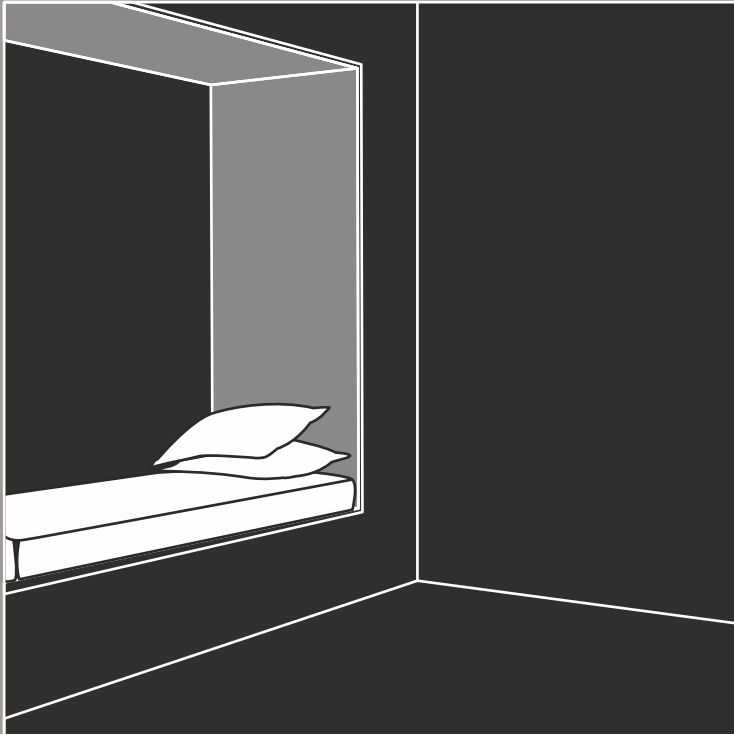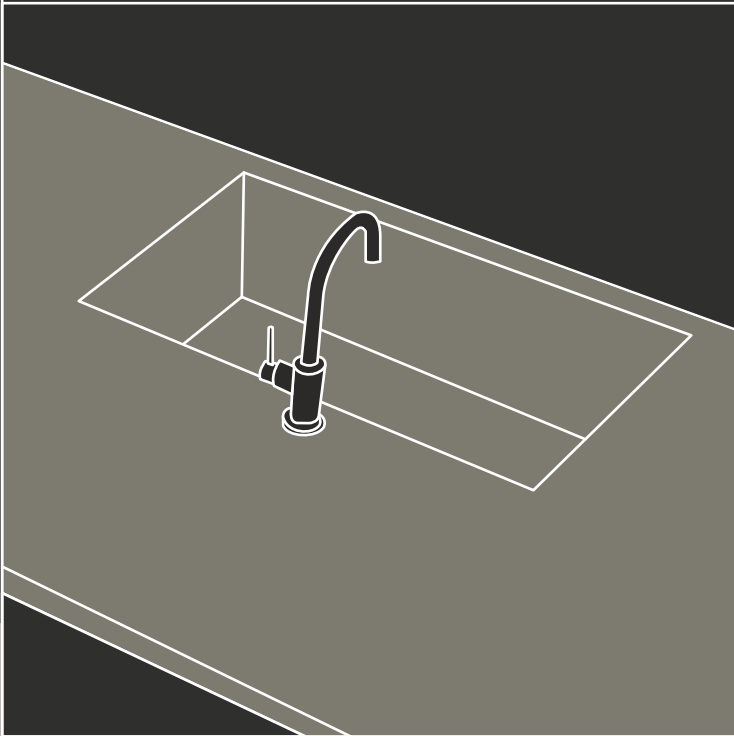

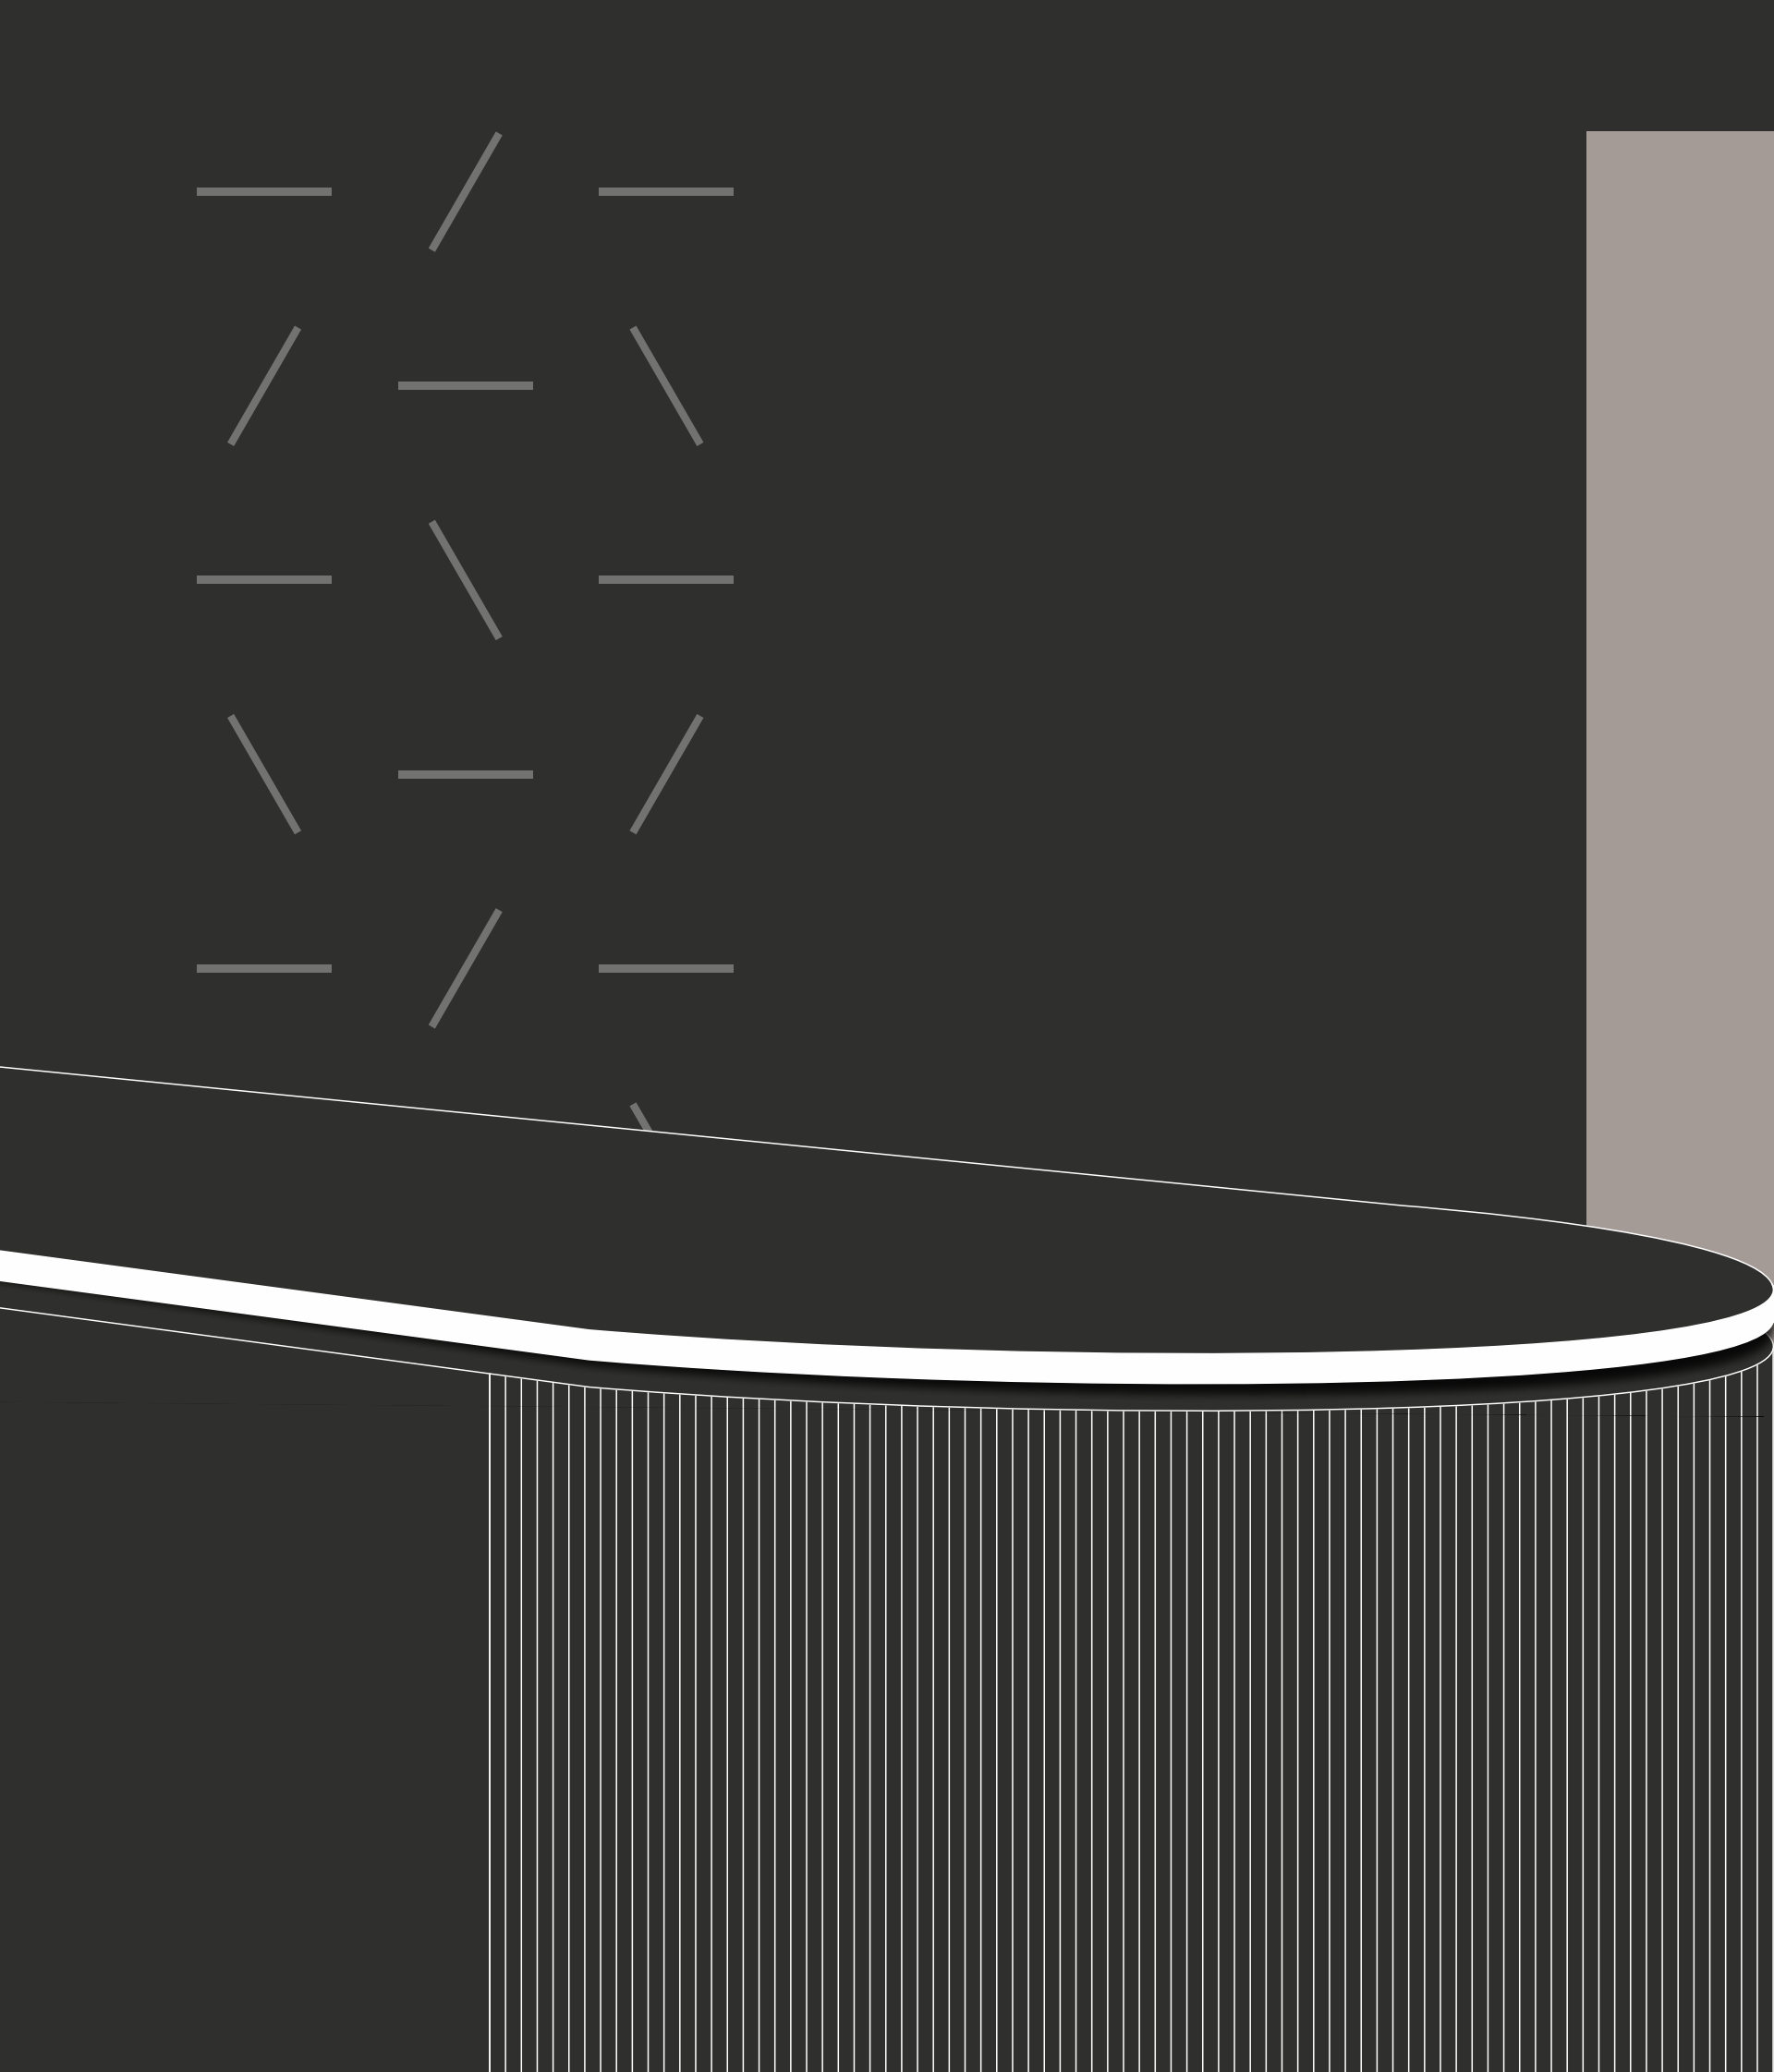

Edge Profiles



Micro bevel



Double straight rounded edge



Straight squared edge



Rounded straight edge



Double straight squared edge



Half bullnose



Rounded edge at 45°



Full bullnose



Squared edge at 45°



Demi bullnose

Joint Possibilities



Birds beak



45° corner



Soft corner

Black

Sand Black



800
X2400
MM
80
X240
CM

FINISH
GLOSSY/MATT



Lowest maintenance

Antibacterial surface

Water resistant

Impact resistant

Frost resistant

Scratch resistant

Stain resistant

Fire resistant

Heat resistant

Resistant to bending



Black

FINISH
MATT

Brown

Sand Brown

-  Lowest maintenance
-  Antibacterial surface
-  Water resistant
-  Impact resistant
-  Frost resistant
-  Scratch resistant
-  Stain resistant
-  Fire resistant
-  Heat resistant
-  Resistant to bending



800
X2400
MM
80
X240
CM

FINISH
GLOSSY/MATT



Sand Brown

FINISH
MATT

Graphite Grey

Steel Grey

Sand Grey



- Lowest maintenance
- Antibacterial surface
- Water resistant
- Impact resistant
- Frost resistant
- Scratch resistant
- Stain resistant
- Fire resistant
- Heat resistant
- Resistant to bending



800
X2400
MM
80
X240
CM

FINISH
GLOSSY/MATT



greffite Grey

FINISH
GLOSSY



Steel Grey

FINISH
MATT



Sand Grey

FINISH
MATT



Lowest maintenance



Antibacterial surface



Water resistant



Impact resistant



Frost resistant



Scratch resistant



Stain resistant



Fire resistant



Heat resistant



Resistant to bending



**800
X2400
MM**
80
X240
CM

FINISH
GLOSSY/MATT



Sand Ivory

FINISH
GLOSSY



Ivory

FINISH
MATT



White

Sand White



Lowest maintenance

Antibacterial surface

Water resistant

Impact resistant

Frost resistant

Scratch resistant

Stain resistant

Fire resistant

Heat resistant

Resistant to bending



800
X2400
MM
80
X240
CM

FINISH
GLOSSY/MATT

TECHNICAL SPECIFICATION

TEST DISCRIPTION				
CHARACTERISTIC		TEST METHOD	STANDARD VALUE	VALUES
Deviation in Length		ISO 10545-2	3 1 mm	Ave. + 0.28 mm Ave. - 0.00 mm
Deviation in Width		ISO 10545-2	31 mm	Ave. + 0.21 mm Ave. - 0.00 mm
Deviation in Thickness		ISO 10545-2	3 0.5 mm	Ave. + 0.00 mm Ave. - 0.16 mm
Straightness of Sides		ISO 10545-2	3 0.8 mm	Max. + 0.18 mm Max. - 0.20 mm
Rectangularity		ISO 10545-2	3 0.8 mm	Max. + 0.20 mm Max. - 0.22 mm
Surface Flatness		ISO 10545-2	3 1.8 mm	Max + 0.14 mm Max - 0.00 mm
Surface Quality		ISO 10545-2	Min. 95%	Min. 99%
PHYSICAL PROPERTIES				
CHARACTERISTIC		TEST METHOD	STANDARD VALUE	VALUES
Water Absorption		ISO 10545-3	0.50%	Avg. 0.0606 %
Modulus of Rapture(N/mm2)		ISO 10545-4	min 35	Avg. 43.11 N/mm2
Breaking Strength(N)		ISO 10545-4	>7.5mm	6270.45 N
THERMAL SHOCK RESISTANCE 15/145.C 10cycle		ISO 10545-9	10 cycle, Min	Conform
Co-Efficent of Linear Thermal Expansion		ISO 10545-8	9x10 6 Max	7,84x10 6
Deep Abrasion Resistance		ISO 10545-6	Max 175mm	123mm3
Scratch Hardness of Surface		Is-13630-13	Min 5 Moh's	5 Moh's Scal
Bulk Density (g/cc)			2.2 Min	2.2748g/cc
Moisture Expansion(mm/m)		ISO 10545-10	0.02mm/m max	No Expansion
Impact Resistance-Coefficient of Restitution		ISO 10545-5	0.55 Min.	0.57 Min
Small Colour Differences		ISO 10545-16		No Difference
Resistance to Stain		ISO 10545-14	Min Class-3	Class-5
Lead and Cadium Release in mg/dm2		ISO 10545-15	0.1mg/dm2	0.00mg/dm2
PACKING DETAIL				
SIZE	THICKNESS	NO. OF SLAB/BOX	WEIGHT/BOX	COVERAGE AREA
80x240 cm	1.5 cm	1 Pcs.	70 KG (approx)	20.66 Sq.ft.

exclusive

TILES

