

exclusive
TILES

**800X
1600MM
Glossy**

**GLOSSY
ENDLESS SERIES**

BRECCIA CAPPUCINO

X
16 MM

GLOSSY
FINISH



BRECCIA CAPPUCINO



Size	Finish	Randoms
800X 1600MM	Glossy	4






BRECCIA CAPPUCINO





BRECCIA NATURAL



 **GLOSSY
FINISH**

BRECCIA NATURAL

Size 800X 1600MM	Finish Glossy	Randoms 4
-------------------------------	-------------------------	---------------------





BRECCIA NATURAL

The image features a background of a light-colored marble with grey veining. Two rectangular panels of the same marble are shown floating in the upper left quadrant, overlapping each other. In the top right corner, there are three small orange horizontal lines of varying lengths. The text 'ITALIAN STATUARIO' is prominently displayed in the center-right area.

ITALIAN STATUARIO

 GLOSSY
FINISH


ITALIAN STATUARIO

Size
800X
1600MM

Finish
Glossy

Randoms
4



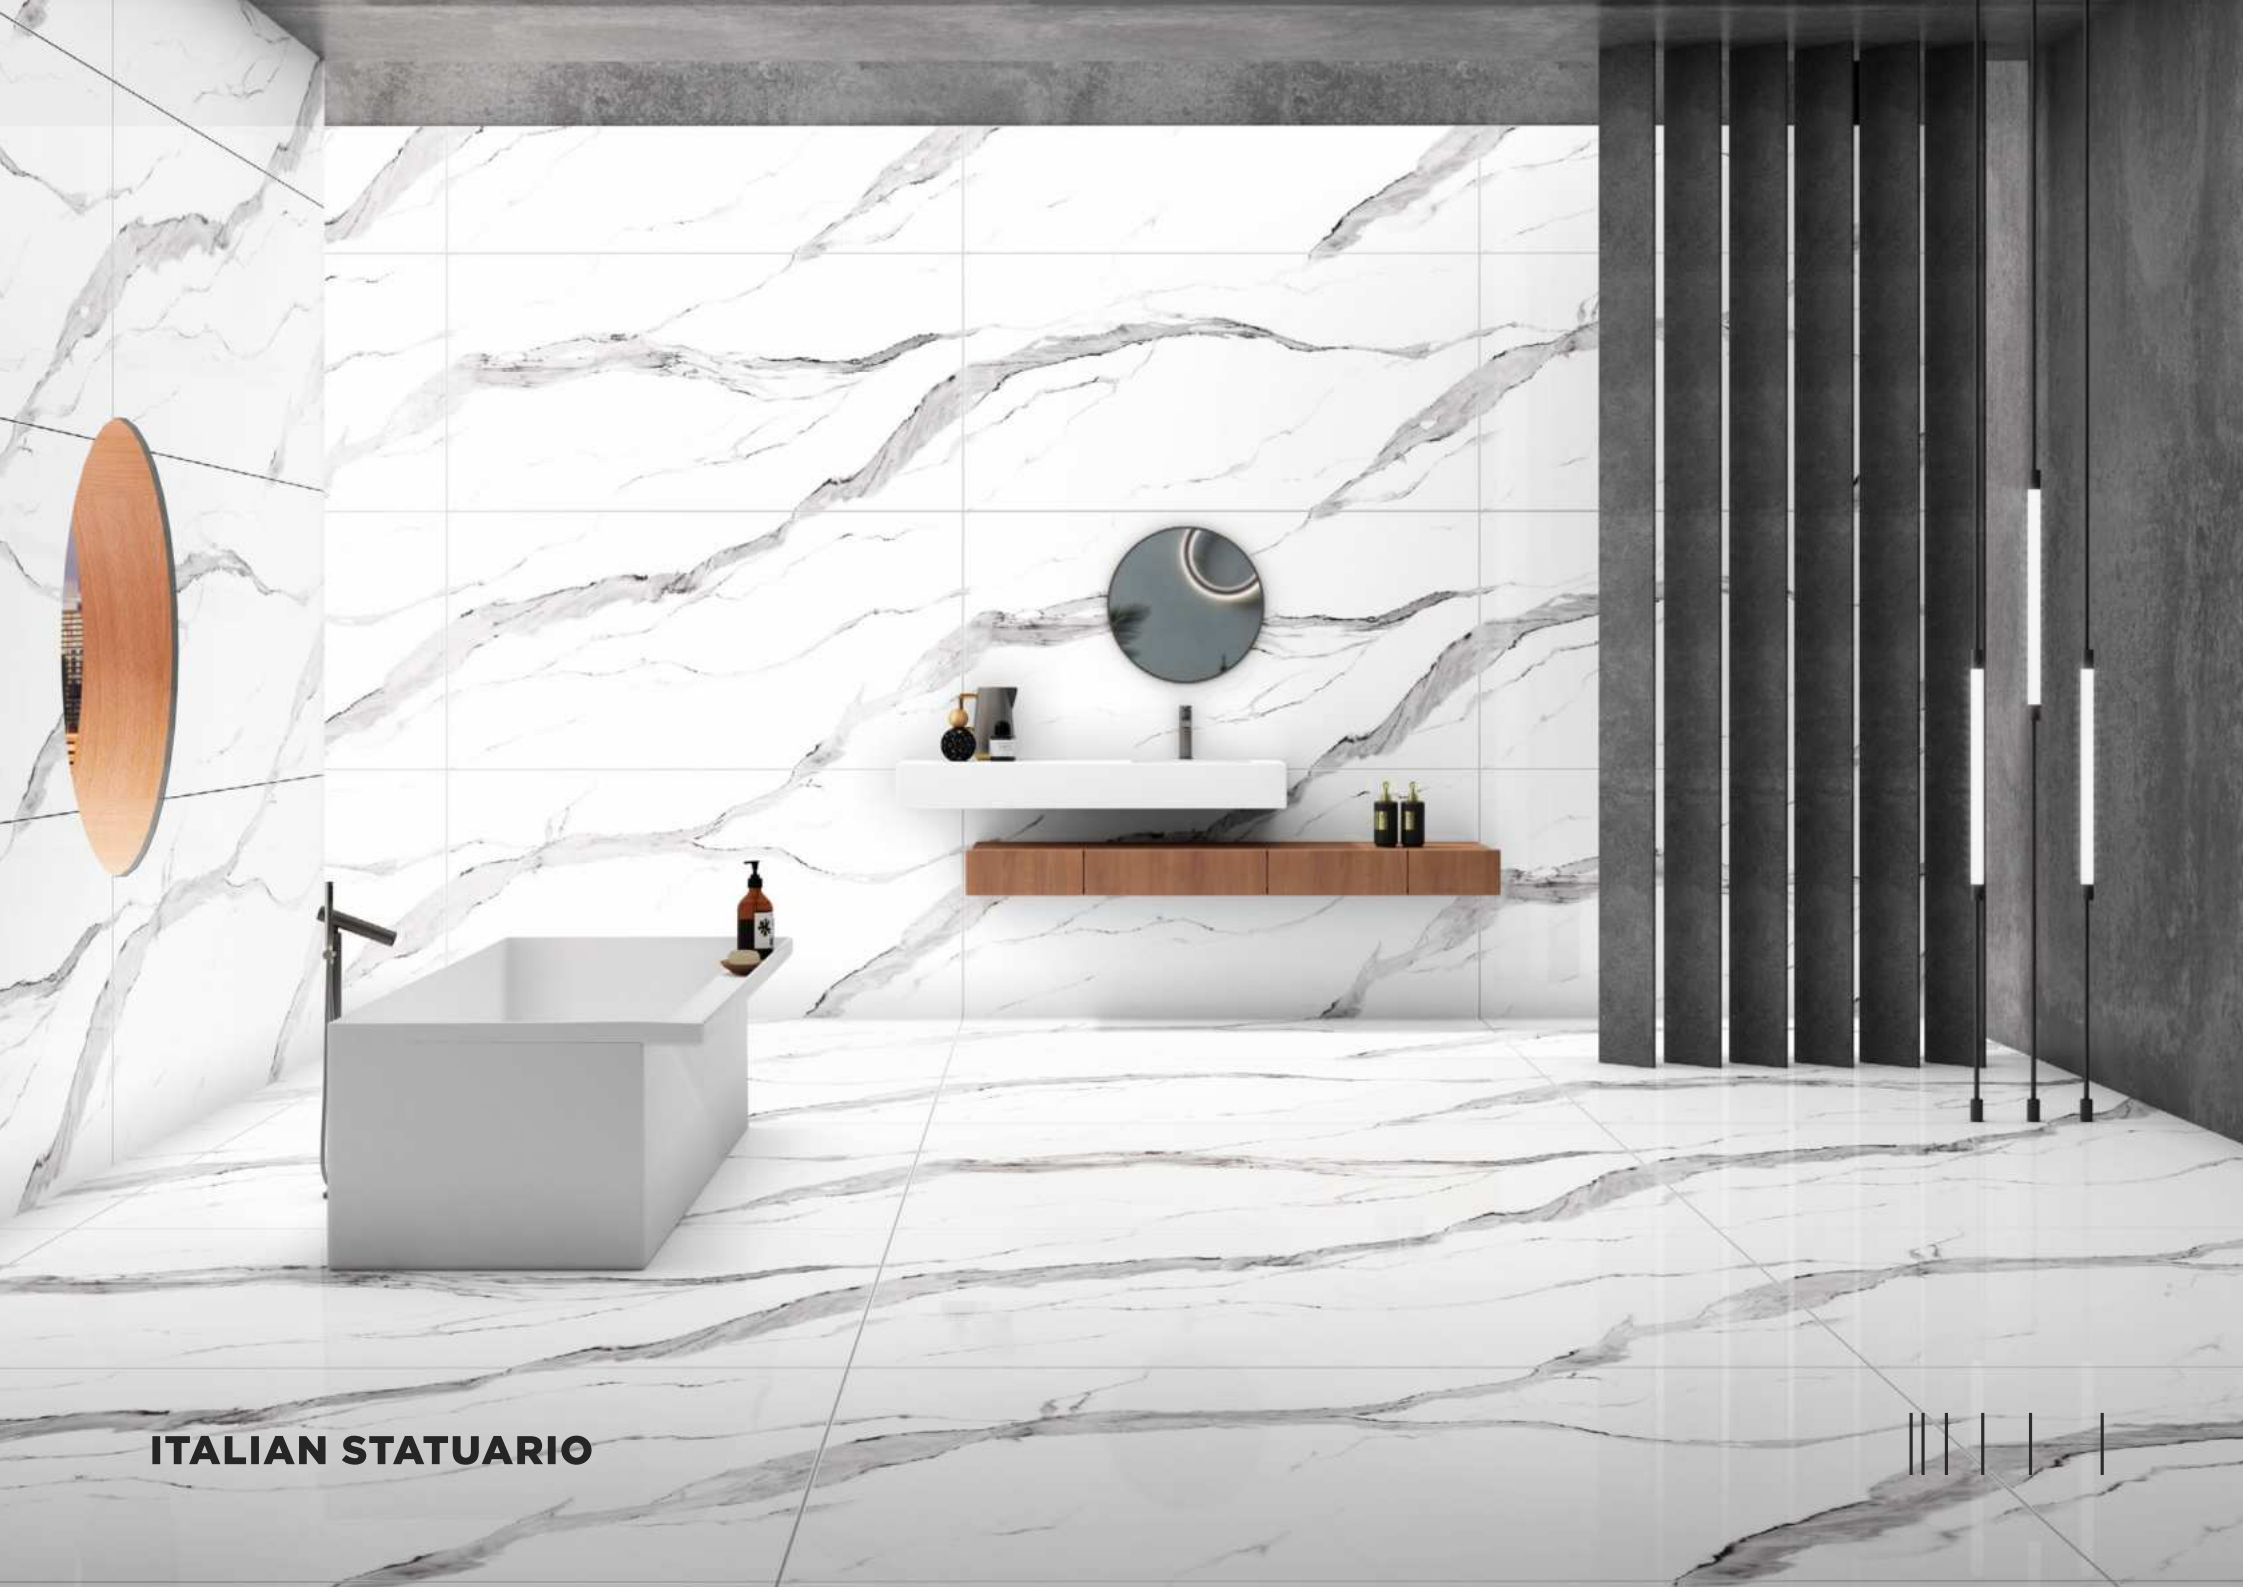

ITALIAN STATUARIO



NACARADO TAN

 GLOSSY
FINISH



NACARADO TAN

Size 800X 1600MM	Finish Glossy	Randoms 4
-------------------------------	-------------------------	---------------------





NACARADO TAN



Technical Specification

CHARACTERISTICS	STANDARD AS PER ISO-13006/En14411 GROUP	VALUES	TEST METHOD
REGULATORY PROPERTIES			
Deviation in Lenth & Width	0.50%	0.20%	ISO - 10545-2
Deviation in Thickness	0.50%	0.50%	ISO - 10545-2
Straightness of Sides	0.50%	0.20%	ISO - 10545-2
Rectangularity	0.50%	0.20%	ISO - 10545-2
Surface Flatness	0.50%	0.20%	ISO - 10545-2
Color Difference	Unaltered	No Change	ISO - 10545-16
Glossiness	As per Mfg.	>90%	Glossmeter
STRUCTURAL PROPERTIES			
Water Absorption	<0.05%	<0.05%	ISO - 10545-3
Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of Repture	Min 35N/MM2	Min 40N/MM2	ISO - 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO - 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO - 10545-5
SURFACE MECHANICAL PROPERTIES			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO - 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost Resistance	No Damage	No Damage	ISO - 10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO - 10545-09
Moisture Expansion	Nil	Nil	ISO - 10545-10
Thermal Expansion	Max 9.0x10 ⁻⁶	Max 6.5x10 ⁻⁶	ISO - 10545-08
Crazing Resistance	As per Mfg.	Min 10 Cycle	ISO - 10545-11
CHEMICAL PROPERTIES			
Chemical Resistance	No Damage	No Damage	ISO - 10545-13
Stain Resistance	Resistant	Resistant	ISO - 10545-14
SAFETY PROPERTIES			
Slip Resistance	As per Mfg.	>0.40	ISO - 10545-17
Fire Resistance	As per Mfg.	Fire Proof	N.A.

Packing Detail

SIZE (In mm)	THICKNESS APPROX	PIECES / PER BOX	COVERAGE AREA IN SQ. FT	BOX WEIGHT (APPROX.)
800X1600	9 MM	2	27.55	52 KG

